

PREMIUM  
**GOODS HOIST**

WEBSITE



FACEBOOK



28, Jalan i-Park 1/3, Kawasan Perindustrian i-Park, Bandar Indahpura, 81000 Kulai, Johor.

[www.powertechinc.asia](http://www.powertechinc.asia) • 07-660 7007

# ADVANTAGES BY HAVING **POWERTECHNIC** PREMIUM **GOODS HOIST**



## **BRAND IMAGE**

Help to build your customer trust



## **LABOUR**

Reducing of manpower dependency



## **COST**

Saving on company operating cost



## **TIME**

Increasing business competitiveness with highly saving on goods transferring time



## **SPACE**

Workspace is begin fully utilised



## **RELIABILITY**

A reliable investments which could last for decades





# SPECIFICATION

## HUMANISED DESIGN



## GOODS HOIST

Safe Working Load	2000 kg		
Car Size	Width	Depth	Height
	1220 mm	1220 mm	2130 mm
	1530 mm	1530 mm	2440 mm
	1830 mm	1830 mm	
	2130 mm	2130 mm	
No. of Stop	2/3/4/5		
Travelling	Up to 12000mm		
Car Wall Material	Mild Steel Plate		
Car Platform	Mild Steel Chequered Plate		
Rigid Guide Rail	Mild Steel I-Beam		
Motor Room	Mild Steel I-Beam with Platform		



# SPECIFICATION

## LANDING AND CAGE DOOR

Door Type

Fast Speed Door

Control Mode

Fully Auto

Door Material

Double Layer Aluminium

Door Opening Speed

100 mm/sec

Door Rail

Trackless

## ELECTRICAL

System

Smart Control

Control Station

Push button with digital display

Control Voltage

DC24V

LED lighting

2

Control Station

At all floor

# EUROPE STANDARD HOIST

## ADVANTAGES OF OUR HOIST



High Tensile Wire Rope



Hoisting Limit Switches




Wire Rope Guide



Overload Protection System

## HOIST SPECIFICATION

Hoist Type	Foot Mounted Electric Wire Rope Hoist
Hoist Model	RVB3-1
Hoist Capacity	5000kg (5 Ton)
Lifting Height	9 / 12 meter
Rope Reeving	2/1
Lifting Speed	10m /1.6min
Lifting Motor	6.1/1.00 Kw
Rope Diameter	ø10mm
Power Supply	415V 50Hz 3ph

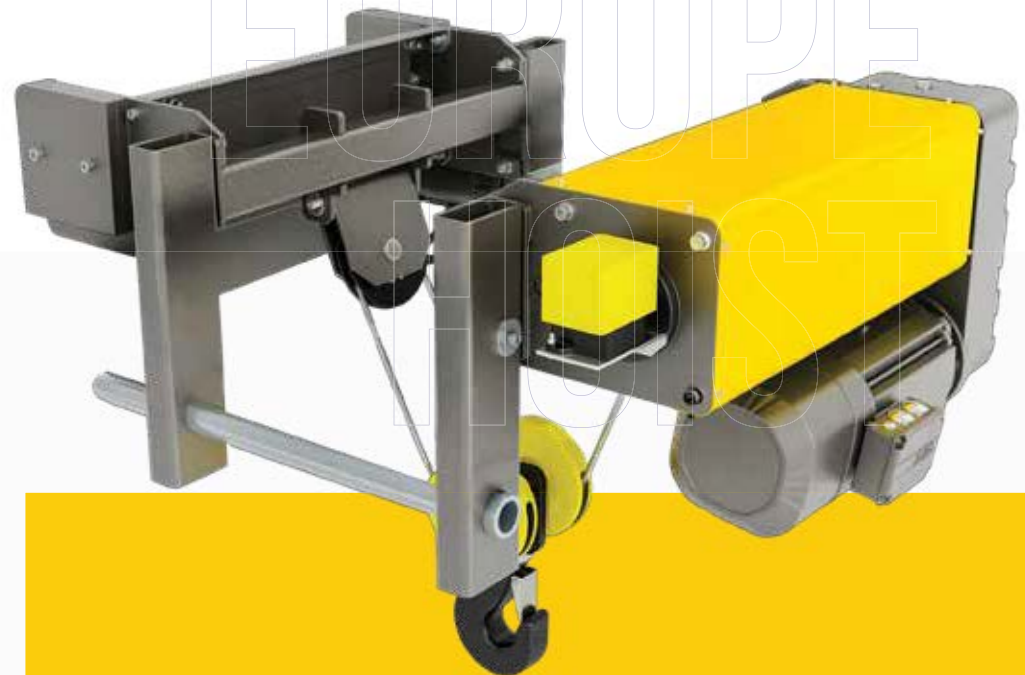

\*product photos for illustration only.

# SAFETY FEATURES

More than 50 years of experience in development and production of hoisting mechanisms.

Our Hoist bear the CE mark for compliance with the Machinery Directive 2006/42/EC providing the regulatory basis for health and safety requirements at European Union level.

- ✓ Programmable Logic Controller
- ✓ Overload Protection System
- ✓ Safety Catch Mechanism
- ✓ Over Travelling Safety Switches
- ✓ Buffer Springs
- ✓ Motion Sensor
- ✓ Hoisting Rope Guide
- ✓ Door Limit Switches
- ✓ Electrical Door Safety Lock





# WHAT MAKE US UNIQUE

UNIQUE



Latest  
Technology



Double Layer  
Aluminium Door



Imported Hoist  
Europe Standard



Trackless Door  
System



Dual Speed  
Motor



Smart Control  
System



High Lifting Speed  
10/1.6 m/min




Overload Protection  
System

# APPS

# APPS PROVIDES MAXIMUM CONVENIENCE

- About us • Schedule • Services History • Equipment Data
- Call for breakdown attendance • Real-time location on service provider
- Paperless system, environment friendly

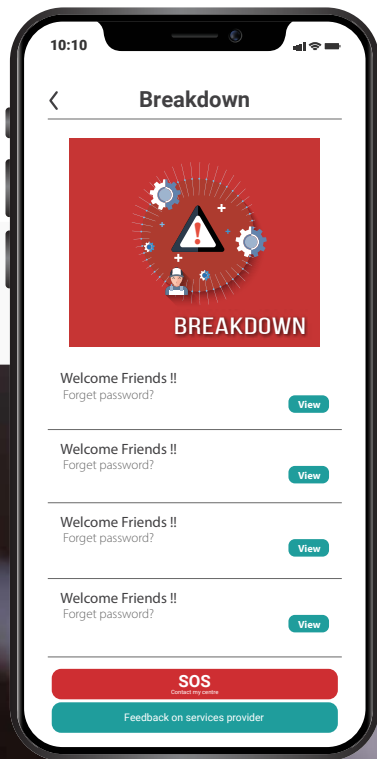

# ALL IN ONE PACKAGE

## FREE

- Service Maintenance
- Part & Component
- Labour
- JKPP Renewal



# 24 HOURS ON-CALL SERVICE





*Make life easy*

A BETTER  
LIVING STYLE

POWERTechnic MARKETING SDN BHD (232075-H)